

Technical sheet :

SILAGE FACING BUCKET




Benefits

- Loads and aerates silages in one operation.
- Ready-to-use silage: direct distribution or use in the mixing wagon.
- Clean silage pit face, limits secondary fermentation.
- Time-saving, a single attachment for the handling of silage and bulk feed.
- For corn silage and grass silage (short wisps).
Not suitable for long wisp silage (10 cm max.).

Technical characteristics

- Synchronized hydraulic movements.
- Hydraulic motor integrated in the rotor, perfect protection & longevity.
- Backward rotor rotation, better bucket filling 500 HB wear plate.
- Handling material with a density ≤ 1000 kg/m³.

| Capacities | | CRS 2150 / 1650 | CRS 2350 / 1800 | CRS 2550 / 2000 |
|------------------------|----|---|---|---|
| Heaped Capacity (l) | | 1650 | 1800 | 2000 |
| Weight and dimensions | | | | |
| Overall width (mm) | b1 | 2150 | 2350 | 2550 |
| Overall weight (kg) | | 920 | - | 950 |
| Working Parameters | | | | |
| Machine Equipment | | Hydraulic line, Return piping to hydraulic oil tank | Hydraulic line, Return piping to hydraulic oil tank | Hydraulic line, Return piping to hydraulic oil tank |
| Machines compatibility | | CRS 2150 / 1650 | CRS 2350 / 1800 | CRS 2550 / 2000 |
| Reference number | | 52612539 | 52612542 | 52612540 |
| MLT 625 - 75 H | | X | - | - |
| MLT 630-105 ST4 | | - | X | - |
| MLT 630-105 V CP ST4 | | - | X | - |
| MLT 630-105 V ST4 | | - | X | - |
| MLT 635-130 PS+ ST4 | | - | - | X |
| MLT 730-115 V CP ST4 | | - | X | - |
| MLT 730-115 V ST4 | | - | X | - |
| MLT 733-115 LSU ST4 | | - | - | X |
| MLT 733-115 ST4 | | - | - | X |
| MLT 737-130 PS+ ST4 | | - | - | X |
| MLT 840-145 PS+ | | - | - | X |
| MLT 1040-145 PS+ L | | - | - | X |
| MLT-X 625 - 75 H | | X | - | - |
| MLT-X 732 | | - | - | X |
| MLT-X 735 T LSU | | - | - | X |
| MLT-X 737-130 PS+ ST4 | | - | - | X |
| MLT-X 840-140 PS+ | | - | - | X |
| MLT-X 1040-140 PS+ L | | - | - | X |

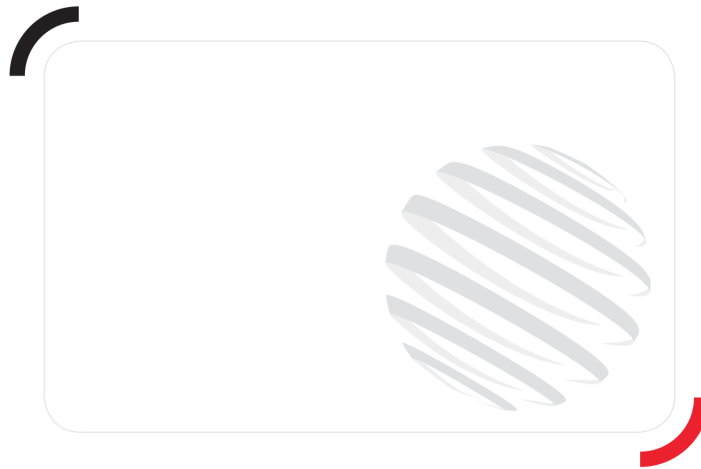

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes