

Technical sheet :

# **PLATFORM WITH WINCH**

---



## **Benefits**

- Performance in cladding & maintenance applications
- Uncompromized safety + unbeaten efficiency
- Heavy duty and galvanized structure for an improved longevity.
- Non-slip metal floor
- Expandable sides are independent
- Manual jib + winch positioning

## **Technical characteristics**

---

- 450kg or 600kg for platform + 450kg or 300kg for winch = 900kg capacity in total.
- 2 different winch capacity / platform capacity couples.
- Hydraulic winch fitted on the rotating (manual) liftable (hydraulic) telescopic (manual) jib.
- Slewing platform + / - 90° on both sides.
- Legally approved for 3 persons.


- Hydraulic jib + winch lifting - prevents from the pulling the load in the basket

- Overload sensor on the platform + overload sensor on the winch.

- Fork sleeves for yard handling.

Capacities		ORH 3M 600kg / 300kg	NAC ARG 450kg / 450kg	NAC ARG 600kg / 300kg
Capacity (kg)		300	450	300
Capacity including people (kg)		600	450	600
Number of people		3	3	3
Weight and dimensions				
Overall height (mm)	h17	2575	2708	2708
Width minimum (mm)		3190	2250	2250
Width maximum (mm)		-	3988	3988
Length (mm)		2206	2206	2206
Overall weight (kg)		1190	1330	1350
Cable length (mm)		30000	30000	30000
Cable loop		Direct	Direct	Direct
Working Parameters				
Machine Equipment		Platform predisposition, Return piping to hydraulic oil tank	Platform predisposition, Return piping to hydraulic oil tank	Platform predisposition, Return piping to hydraulic oil tank
Hook Speed (m/mn)		-	80	-
Rotation 1		180	180	180
Hydraulic system		false	false	false

Machines compatibility	ORH 3M 600kg / 300kg	NAC ARG 450kg / 450kg	NAC ARG 600kg / 300kg
Reference E-RECO (non-standard)	-	-	939155
Reference number E-RECO	53004852	914440	923336
MHT 1490	X	-	-
MHT-X 1490	X	-	-
MRT 1640 Easy T4 S2 400°	-	-	X
MRT 1840 Easy T4 S2 360°	-	-	X
MRT 1840 Easy T4 S2 400°	-	-	X
MRT 2145 Easy T4 S1 400°	-	-	X
MRT 2145 Easy T4 S2 400°	-	-	X
MRT 2150 Privilege Plus	-	X	X
MRT 2470 Privilege Plus	-	X	X
MRT 2545 Easy T4 S2 360°	-	-	X
MRT 2545 Easy T4 S2 400°	-	-	X
MRT 2550 Privilege Plus	-	X	X
MRT 3050 Privilege Plus	-	X	X
MRT 3255 Privilege Plus	-	X	X
MRT-X 1440 Easy 400°	-	-	X
MRT-X 1640 Easy 360°	-	-	X
MRT-X 1640 Easy 400°	-	-	X
MRT-X 1840 Easy 360°	-	-	X
MRT-X 1840 Easy 400°	-	-	X
MRT-X 2150 Privilege Plus	-	X	X
MRT-X 2470 Privilege Plus	-	X	X
MRT-X 2545 Easy 360°	-	-	X
MRT-X 2545 Easy 400°	-	-	X
MRT-X 2550 Privilege Plus	-	X	X
MRT-X 3050 Privilege Plus	-	X	X
MRT-X 3255 Privilege Plus	-	X	X
Reference number E-RECO 2	-	939246	939245
MHT 10130	-	X	X
MHT 10180	-	X	X
MHT 10230	-	X	X
MHT-X 10130	-	X	X
MHT-X 10180	-	X	X
MHT-X 10230	-	X	X

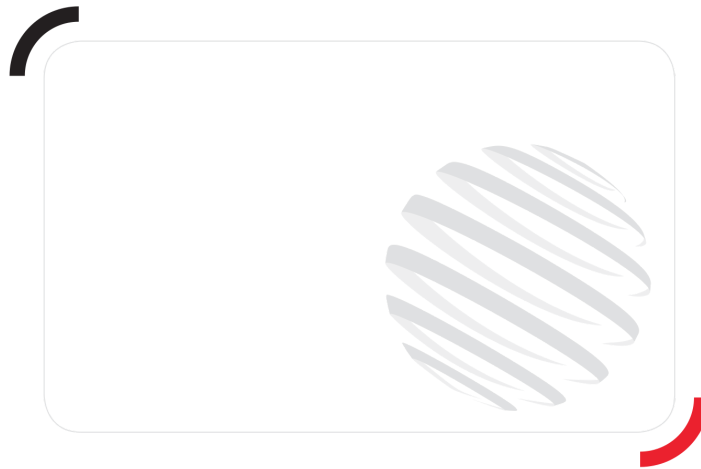

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508  
RCS Nantes