

Technical sheet :


# ***TMM 25***

---




Technical characteristics			Metric	Imperial
1.1	Manufacturer		Manitou	Manitou
1.2	Model Name		TMM 25	TMM 25
1.2.1	Reach out equipment		Pantograph	Pantograph
1.3	Power source		Diesel	Diesel
1.4	Operator type		Seated	Seated
1.5	Max. capacity	Q	2500 kg	5512 lbs
1.6	Load centre of gravity	c	600 mm	23.622 in
1.8	Load distance, centre of drive axle to fork	x	-500 mm	-19.685 in
1.9	Wheelbase	y	1598 mm	62.913 in
Weight				
2.1	Service Weight		2340 kg	5159 lbs
Wheels				
3.1	Tyres type		Inflatable	Inflatable
3.2	Dimensions of front wheels		27x10-12 IC30	27x10-12 IC30
3.3	Dimensions of rear wheels		27x10-12 IC30	27x10-12 IC30
3.5	Number of front wheels / rear wheels		2 / 1	2 / 1
3.5.1	Drive wheels (front / rear)		2 / 1	2 / 1
3.6	Front wheel gauge	b10	2151 mm	84.685 in
Dimensions				
4.7	Height of overhead guard (cabin)	h6	2120 mm	83.465 in
4.19	Overall length	l1	2638 mm	103.858 in
4.21	Overall width	b1	2406 mm	94.724 in
4.22	Forks section / width / length	s / e / l	40 mm x 125 mm x 1200 mm	1.575 in x 4.921 in x 47.244 in
4.23	Fork carriage ISO 2328 (class/form) A/B		2A	2A
4.24	Fork carriage width	b3	1260 mm	49.606 in
4.26	Distance between wheel arms/loading surfaces	b4	1600 mm	62.992 in
4.32	Ground clearance at centre of wheelbase	m2	270 mm	10.63 in
4.28	Max. Reach	l4	1005 mm	39.567 in
4.37	Overall length (without forks)	l7	2285 mm	89.961 in
4.35	Turning radius	Wa	2463 mm	96.969 in
Performances				
5.1	Travel speed (laden / unladen)		11.2 km/h / 11.2 km/h	7 mph / 7 mph
5.7	Gradeability - laden / unladen		43 % / 26 %	43 % / 26 %
5.9	Service brake		Hydraulic	Hydraulic
5.11	Transmission type		Hydrostatic	Hydrostatic
Engine				
7.1	Engine brand		Kubota	Kubota
7.4	Number of cylinders / Capacity of cylinders		4 - 1498 cm <sup>3</sup>	4 - 91.41 in <sup>3</sup>
7.3	Rated speed		3000 tr/min	3000 tr/min
7.2	Engine power according to ISO 1585		26.5 kW	26.5 kW
Miscellaneous				
8.2	Working hydraulic pressure for attachments (bar)		190 Bar	13 PSI
8.3	Oil flow rate for attachments		43 l/min	43 l/min
8.4	Sound level at the driver's ear according to DIN 12 053		86 dB(A)	86 dB(A)

## Dimensional drawing

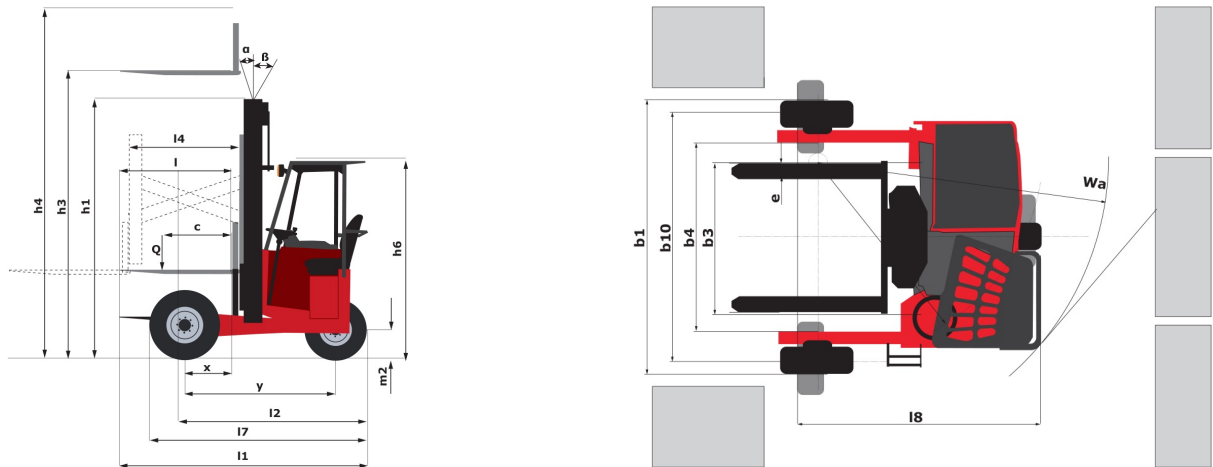

## Characteristics of masts and residual capacities

		Full Visibility Duplex				
		FVD 30	FVD 36	FVD 39		
Residual Capacity (Maximum Height & LC = 600)	Simple Reach	h1 - Height mast Lowered	mm	2392	2742	2892
		h3 - Lifting Height	mm	3000	3600	3900
		h4 - Height mast extended	mm	4495	5095	5395
		Pantograph reach in	kg	2500	2500	2500
		Pantograph reach out with stabilizers	kg	2000	1950	1900
		Pantograph reach out without stabilizers	kg	1050	1000	950
	Double Reach	Telescopic forks reach in	kg	2500	2500	2500
		Telescopic Forks reach out with stabilizers	kg	1350	1300	1300
		Telescopic Forks reach out without stabilizers	kg	1150	1100	1050
		Pantograph & TF reach in	kg	2500	2500	2500
		Pantograph & TF reach out with stabilizers	kg	1100	1100	1100
		Pantograph & TF reach out without stabilizers	kg	550	550	550

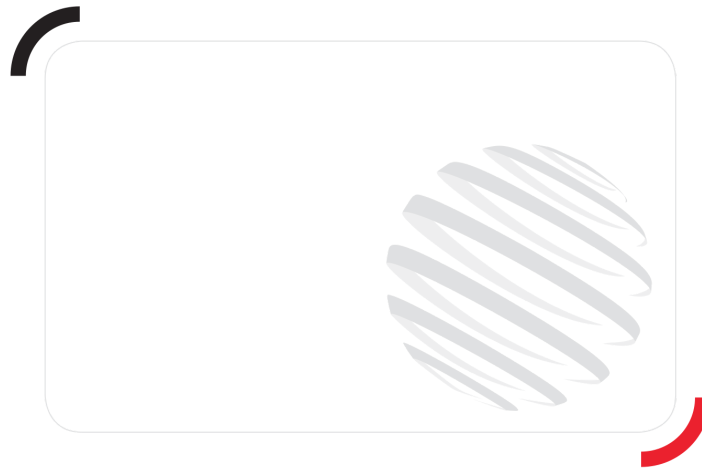

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508  
RCS Nantes