

Technical sheet :


# ES-C 711



 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics			Metric	Imperial
1.1	Manufacturer		Manitou	Manitou
1.2	Model Name		ES-C 711	ES-C 711
1.3	Power source		Electrical	Electrical
1.4	Operator type		Pedestrian	Pedestrian
1.5	Max. capacity	Q	1100 kg	2425 lb
1.6	Load center of gravity	c	500 mm	20 in
1.8	Distance from Load backrest to center of rear axle	x	157 mm	6 in
1.9	Wheelbase	y	940 mm	37 in
Weight				
2.1	Service weight		2300 kg	5071 lb
2.2	Weight on front axle (laden) / rear axle (laden)		475 kg / 2910 kg	1047 lb / 6415 lb
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		1250 kg / 1050 kg	2756 lb / 2315 lb
Wheels				
3.1	Tires type		Polyurethane	Polyurethane
3.3	Number of load wheels / Size of load wheels		2 / 250x100	2 / 250x100
3.5	Number of front wheels / rear wheels		1 / 2	1 / 2
3.5.2	Number of drive wheels / Size of drive wheels		1/254x100	1/254x100
3.7	Rear wheel gauge	b11	1003 mm	39 in
Dimensions				
4.15	Fork height in low position	h13	40 mm	2 in
4.19	Overall length	l1	2430 mm	96 in
4.20	Length to face of forks	l2	1280 mm	50 in
4.21	Overall width	b1	1120 mm	44 in
4.22	Forks section / width / length	s / e / l	35 mm / 100 mm / 1150 mm	1 in / 4 in / 45 in
4.24	Fork carriage width	b3	750 mm	30 in
4.31	Ground clearance below mast	m1	31 mm	1 in
4.32	Ground clearance at centre of wheelbase	m2	52 mm	2 in
4.35	Turning radius	Wa	1305 mm	51 in
4.9	Height tiller min. / max.	h14 / h14	1005 mm / 1405 mm	40 in / 55 in
Performances				
5.1	Travel speed (laden / unladen)		6 km/h / 6 km/h	4 mph / 4 mph
5.2	Lifting speed (laden / unladen)		0.11 m/s / 0.20 m/s	0.36 ft/s / 0.66 ft/s
5.3	Lowering speed (laden / unladen)		0.22 m/s / 0.21 m/s	0.72 ft/s / 0.69 ft/s
5.8	Max Gradeability (laden / unladen)		5 % / 8 %	5 % / 8 %
5.10	Service brake		Electro magnetic	Electro magnetic
Engine				
6.1	Drive motor rating S2 60 min		2 kW	2 kW
6.2	Lift motor rating at S3 15%		4 kW	4 kW
6.3	Battery according to DIN 43531/35/36 A, B, C		DIN 43535-B	DIN 43535-B
6.4	Battery voltage / capacity		24 V / 315 Ah	24 V / 315 Ah
6.5	Battery weight (+/- 5%)		275 kg	606 lb
Miscellaneous				
8.1	Type of drive control		DC	DC
8.4	Sound level at the driver's ear according to DIN 12 053		65 dB	65 dB

## ES-C 711 - Dimensional drawing

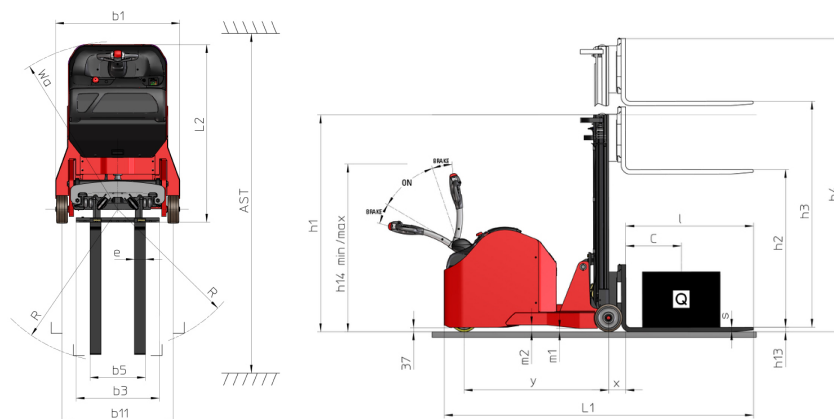

# Characteristics of masts and residual capacities

Central Cylinder Simplex (CCS)		CCS 15	CCS 17
h1 - Mast lowered height	in (mm)	77 (1955)	86.8 (2205)
h2 - Mast free lift	in (mm)	57.7 (1465)	67.5 (1715)
h3 - Mast lifting height	in (mm)	57.7 (1465)	67.5 (1715)
h4 - Mast extended height	in (mm)	79.9 (2030)	89.8 (2280)
Residual capacity at max height	lb (kg)	2425 (1100)	2425 (1100)

Full Visibility Duplex (FVD)		FVD 29	FVD 34	FVD 38
Mast/fork carriage tilt, forward	°	3	3	3
h1 - Mast lowered height	in (mm)	77 (1955)	86.8 (2205)	94.7 (2405)
h3 - Mast lifting height	in (mm)	113.8 (2890)	133.5 (3390)	149.2 (3790)
h4 - Mast extended height	in (mm)	136 (3455)	155.7 (3955)	171.5 (4355)
Residual capacity at max height	lb (kg)	2425 (1100)	2425 (1100)	2425 (1100)

Free Lift Duplex (FLD)		FLD 29	FLD 34
h1 - Mast lowered height	in (mm)	77 (1955)	86.8 (2205)
h2 - Mast free lift	in (mm)	57.7 (1465)	67.5 (1715)
h3 - Mast lifting height	in (mm)	113.8 (2890)	133.5 (3390)
h4 - Mast extended height	in (mm)	136 (3455)	155.7 (3955)
Residual capacity at max height	lb (kg)	2425 (1100)	2425 (1100)

Free Lift Triplex (FLT)		FLT 42	FLT 47	FLT 54
h1 - Mast lowered height	in (mm)	75.4 (1915)	81.7 (2075)	91.1 (2315)
h2 - Mast free lift	in (mm)	56.1 (1425)	62.4 (1585)	72.2 (1835)
h3 - Mast lifting height	in (mm)	165.6 (4205)	184.4 (4685)	213.2 (5415)
h4 - Mast extended height	in (mm)	187.8 (4770)	206.7 (5250)	235.4 (5980)
Residual capacity at max height	lb (kg)	1874 (850)	1433 (650)	882 (400)



**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes