

Technical sheet :

# **2550 RT**

---




| Capacities                                |     | Metric                                    | Imperial                                  |
|---|-----|---|---|
| Max. capacity                             | Q   | 3305 kg                                   | 7286 lbs                                  |
| Operating Weight                          |     | 5260 kg                                   | 11596 lbs                                 |
| Operating Capacity at 35% Tipping Load    |     | 1157 kg                                   | 2551 lbs                                  |
| Operating Capacity At 50% Tipping Load    |     | 1652 kg                                   | 3642 lbs                                  |
| Tipping capacity                          |     | 3305 kg                                   | 7286 lbs                                  |
| Weight and dimensions                     |     |   |   |
| Overall Operating Height - Fully Raised   | h27 | 4267 mm                                   | 167.992 in                                |
| Height to Hinge Pin - Fully Raised        | h28 | 3251 mm                                   | 127.992 in                                |
| Reach - Fully Raised                      | dp1 | 876 mm                                    | 34.488 in                                 |
| Dump angle at full height                 | a5  | 41 °                                      | 41 °                                      |
| Dump Height - Fully Raised                | h29 | 2489 mm                                   | 97.992 in                                 |
| Maximum Rollback Angle - Fully Raised     | a4  | 102.5 °                                   | 102.5 °                                   |
| Overall Height to Top of Rops             | h17 | 2111 mm                                   | 83.11 in                                  |
| Overall length with bucket                | l16 | 4008 mm                                   | 157.795 in                                |
| Departure angle                           | a2  | 25 °                                      | 25 °                                      |
| Overall Length without Bucket             | l1  | 3221 mm                                   | 126.811 in                                |
| Specified Height                          | h31 | 1720 mm                                   | 67.717 in                                 |
| Reach at Specified Height                 | r4  | 795 mm                                    | 31.299 in                                 |
| Dump angle at specified height            | a17 | 66.8 °                                    | 66.8 °                                    |
| Maximum Rollback Angle at Ground          | a13 | 30 °                                      | 30 °                                      |
| Carry Position                            | d5  | 208 mm                                    | 8.189 in                                  |
| Maximum Rollback Angle at Carry Position  | a14 | 31.6 °                                    | 31.6 °                                    |
| Digging Position                          | h32 | 13 mm                                     | 0.512 in                                  |
| Angle of Departure with STD Counterweight |     | 25 °                                      | 25 °                                      |
| Ground clearance                          | m4  | 313 mm                                    | 1026 ft 11 in                             |
| Track gauge                               | b10 | 1313 mm                                   | 51.693 in                                 |
| Track Shoe Width                          | b20 | 450 mm                                    | 17.717 in                                 |
| Crawler base                              | y2  | 1562 mm                                   | 61.496 in                                 |
| Overall width less bucket                 | b1  | 1765 mm                                   | 69.488 in                                 |
| Bucket Width                              | e1  | 2131 mm                                   | 83.898 in                                 |
| Clearance Radius - Front with Bucket      |     | 2499 mm                                   | 98.386 in                                 |
| Clearance Circle - Rear                   | wa1 | 1796 mm                                   | 70.709 in                                 |
| Maximum rollback at specified height      |     | 66.8 °                                    | 66.8 °                                    |
| Angle of Approach                         |     | 90 °                                      | 90 °                                      |
| Grouser Height                            |     | 25 mm                                     | 0.984 in                                  |
| Track Type / Track Rollers / Roller Type  |     | Rubber / 5 / Steel                        | Rubber / 5 / Steel                        |
| Performances                              |     |   |   |
| Ground Speed - Single Speed               |     | 8.5 km/h                                  | 5.3 mph                                   |
| Ground Speed - Two Speed                  |     | 12.1 km/h                                 | 7.5 mph                                   |
| Drawbar Pull/Tractive Effort              |     | 5649 kg                                   | 12454 lbs                                 |
| Bucket Breakout - Tilt Cylinder           |     | 3803 kg                                   | 8384 lbs                                  |
| Bucket Breakout - Lift Cylinder           |     | 3373 kg                                   | 7436 lbs                                  |
| Engine                                    |     |   |   |
| Engine brand                              |     | Deutz                                     | Deutz                                     |
| Engine model                              |     | TD 3.6 L4                                 | TD 3.6 L4                                 |
| Motor Type                                |     | Axial Piston Planetary Gear Box Reduction | Axial Piston Planetary Gear Box Reduction |
| Gross Power (kW) / Gross Power            |     | 55.4 kW / 2300 tr/min                     | 55.4 kW / 2300 tr/min                     |
| Net Power (kW) / Net Power                |     | 52.7 kW / 2300 tr/min                     | 52.7 kW / 2300 tr/min                     |
| Max. torque                               |     | 330 Nm/m                                  | 330 Nm/m                                  |
| Battery                                   |     | 12 V                                      | 12 V                                      |
| Cold Cranking Amps at Temperature (CCA)   |     | 950                                       | 950                                       |
| Alternator - Voltage / Ampere             |     | 12 V / 120 A                              | 12 V / 120 A                              |
| Hydraulics                                |     |   |   |
| Auxiliary hydraulics                      |     | 110 l/min                                 | 110 l/min                                 |
| Tank capacities                           |     |   |   |
| Oil Pan Capacity                          |     | 8.50 l                                    | 1.87 gal                                  |
| Hydraulic tank capacity                   |     | 52.20 l                                   | 11.48 gal                                 |
| Fuel tank                                 |     | 121.10 l                                  | 26.64 gal                                 |
| Coolant Capacity                          |     | 23.10 l                                   | 5.08 gal                                  |
| Displacement / Number of cylinders        |     | 3.60 l / 4                                | 0.79 gal / 4                              |

|                                 |  |             |             |
|---------------------------------|--|-------------|-------------|
| <b>Noise and vibration</b>      |  |             |             |
| Environmental noise (LwA)       |  | 106.1 dB(A) | 106.1 dB(A) |
| Noise at driving position (LpA) |  | 85.8 dB(A)  | 85.8 dB(A)  |
| <b>Miscellaneous</b>            |  |             |             |
| Ground Pressure                 |  | 0 Bar       | 0 PSI       |

## Equipment

|  |          |
|--|----------|
| ---  |          |
| Selectable Self-Leveling Hydraulic Lift Action 4 | Optional |
| <b>Lifting function</b>                          |          |
| All-Tach® Attachment Mounting System             | Standard |
| Auxiliary Hydraulics                             | Standard |
| Electronic Attachment Control - 14-Pin Connector | Optional |
| High-Flow Auxiliary Hydraulics                   | Optional |
| IdealTrax™ Automatic Track Tensioning System     | Standard |
| Power-A-Tach® Attachment Mounting System         | Optional |
| <b>Motorization/Power</b>                        |          |
| Combination Radiator & Hydraulic Oil Cooler      | Standard |
| Dual-Element Air Cleaner with Indicator          | Standard |
| Elevated Planetary Final Drives                  | Standard |
| Engine Auto-Shutdown System                      | Standard |
| Glowplugs Starts Assist                          | Standard |
| Horsepower Management System                     | Standard |
| Two-Speed Hydrostatic Drive System               | Standard |
| <b>Operator station</b>                          |          |
| Air suspension seat                              | Optional |
| Drive Sensitivity Adjustment                     | Standard |
| Electro-Hydraulic Joystick Controls              | Standard |
| Foot Throttle                                    | Standard |
| Full-Suspension Seat                             | Standard |
| IdealAccess™ Fold-Up Door                        | Optional |
| Multi-Function Function Display Screen           | Standard |
| Pressurized Cab Enclosure with A/C               | Optional |
| Rearview Camera                                  | Standard |
| ROPS/FOPS Level II Overhead Guard                | Standard |
| Sliding Side Windows                             | Standard |
| Swing-out Cab Door                               | Standard |
| Variable Speed Control, Selectable On & Off      | Optional |
| <b>Pneumatics</b>                                |          |
| Rubber Track Undercarriage System                | Standard |
| Single Flange Front/Dual Flange Rear Idlers      | Standard |
| <b>Safety</b>                                    |          |
| Anti-Vandalism Lock Provisions                   | Standard |
| Back-Up Alarm                                    | Standard |
| Easy Manager                                     | Standard |
| Engine Alert System with Error Display           | Standard |
| Mechanical Lift Cylinder Lock                    | Standard |
| Straight Tracking                                | Standard |
| Tilt-out Foot Pod                                | Standard |
| <b>Secondary functions</b>                       |          |
| Counterweight                                    | Standard |
| Dedicated Undercarriage                          | Standard |

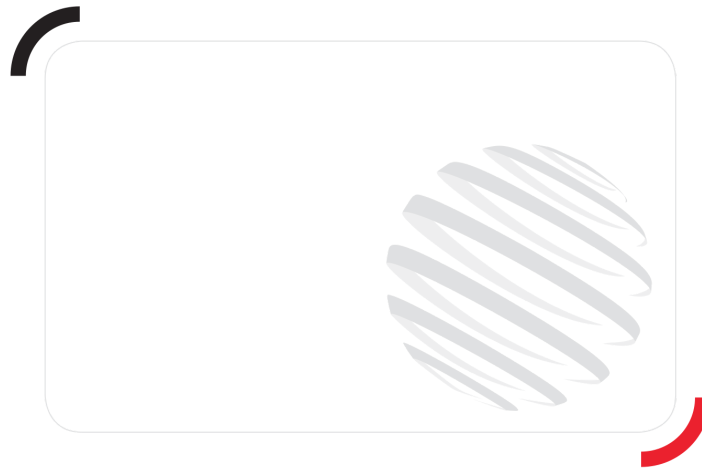

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508  
RCS Nantes