

Technical sheet :

MLT 420-60 H



 **MANITOU**
HANDLING YOUR WORLD

Capacities		Metric	Imperial
Max. capacity	Q	2000 kg	4409 lb
Max. lifting height	h3	4.35 m	14 ft 3 in
Max. outreach		2.65 m	8 ft 8 in
Reach at max. height		1 m	3 ft 3 in
Breakout force with bucket		1886 daN	1886 daN
Weight and dimensions			
Unladen weight (with forks)		4190 kg	9237 lb
Ground clearance	m4	0.26 m	10 in
Wheelbase	y	2.13 m	7 ft
Overall length to carriage (with hitch)	l11	3.64 m	11 ft 11 in
Overall length to carriage (without hitch)	l3	3.64 m	11 ft 11 in
Front overhang		1.04 m	3 ft 5 in
Overall width	b1	1.49 m	4 ft 11 in
Overall cab width	b4	0.80 m	2 ft 7 in
Overall height	h17	1.96 m	6 ft 5 in
Tilt-down angle	a5	116 °	116 °
Tilt-up angle	a4	12 °	12 °
External turning radius (over tyres)	Wa1	3.06 m	10 ft
Standard tires		CAMSO - SKS532 - 12-16.5 145A2	CAMSO - SKS532 - 12-16.5 145A2
Drive wheels (front / rear)		2 / 2	2 / 2
Steering wheels (front / rear)		2 / 2	2 / 2
Performances			
Lifting		5 s	5 s
Lowering		3.50 s	3.50 s
Extension		4.80 s	4.80 s
Retraction		3 s	3 s
Crowd		3.30 s	3.30 s
Dump		2.70 s	2.70 s
Engine			
Engine brand		Kubota	Kubota
Engine nom		Stage V	Stage V
Engine model		V2607-CR-E5B	V2607-CR-E5B
Number of cylinders - Capacity of cylinders		4 - 2615 cm³	4 - 160 in³
I.C. Engine power rating / Power		57 Hp / 42 kW	57 Hp / 42 kW
Max. torque / Engine rotation		174 Nm @1600 rpm	128 ft/lbs @1600 rpm
Drawbar pull (Laden)		2850 daN	2850 daN
Reversible fan		Standard	Standard
Engine cooling system		2 radiators water + hydraulic oil	2 radiators water + hydraulic oil
Transmission			
Transmission type		Hydrostatic	Hydrostatic
Number of gears (forward / reverse)		2 / 2	2 / 2
Max. travel speed (may vary according to applicable regulations)		25 km/h	16 mph
Differential lock		Limited slip differential on front axle	Limited slip differential on front axle
Parking brake		Automatic negative parking brake	Automatic negative parking brake
Hydraulics			
Hydraulic pump type		Gear pump	Gear pump
Hydraulic flow - Pressure		77 l/min - 235 bar	20 US gpm - 3408 PSI
Tank capacities			
Hydraulic oil		70 l	18 US gal
Fuel tank		60 l	16 US gal
Noise and vibration			
Noise at driving position (LpA) tested following NF EN 12053 nom		76 dB	76 dB
Noise to environment (LwA)		104 dB	104 dB
Vibration to whole hand/arm		< 2.50 m/s²	< 2.50 m/s²
Miscellaneous			
Tractor homologation			
Safety cab homologation		ROPS - FOPS level 1 cab	ROPS - FOPS level 1 cab
Controls		JSM	JSM

Optional tires tab

Optional tires

ALLIANCE - A550 - 305/70 R16.5 141A5
TRELLEBORG - TH400 - 11LR16 130A8


Overall height

6 ft 5 in (1.96 m)
6 ft 6 in (1.97 m)

Overall width

4 ft 10 in (1.48 m)
4 ft 11 in (1.49 m)

MLT 420-60 H - Dimensional drawing

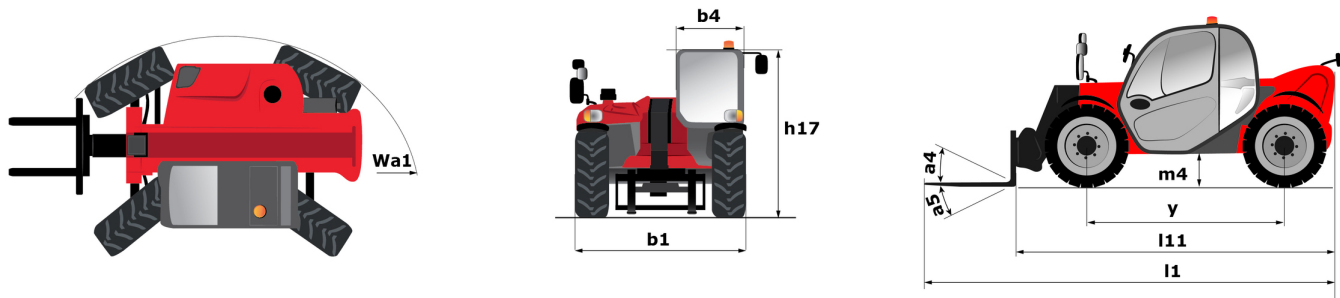



Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes