


# R135

# SKID LOADERS



# GEHL®

| Kapazität  |     | Metrisch                | Zoll                    |
|--|-----|-------------------------|-------------------------|
| Rated Operating Capacity                             |     | 612 kg                  | 1349 lb                 |
| Rated Operating Capacity with Optional Counterweight |     | 680 kg                  | 1499 lb                 |
| Eigengewicht   |     | 2383.62 kg              | 5255 lb                 |
| Gewicht und Abmessungen                              |     |                         |                         |
| Overall Operating Height - Fully Raised              | h27 | 3670.30 mm              | 144 in                  |
| Höhe bis Schaufeldrehpunkt – bei max. Hubhöhe        | h28 | 2790 mm                 | 110 in                  |
| Overall Height to Top of ROPS                        | h17 | 1930 mm                 | 76 in                   |
| Auskippwinkel bei voller Hubhöhe                     | a5  | 40 °                    | 40 °                    |
| Dump height  | h29 | 2120 mm                 | 83 in                   |
| Overall length with bucket                           | l16 | 3073.40 mm              | 121 in                  |
| Dump reach - Full height                             | r6  | 591 mm                  | 23 in                   |
| Einkippwinkel auf Standebene                         | a13 | 28 °                    | 28 °                    |
| Seat to ground height                                | h30 | 871.22 mm               | 34 in                   |
| Radstand   | y   | 950 mm                  | 37 in                   |
| Overall width less bucket                            | b1  | 1364 mm                 | 54 in                   |
| Schaufelbreite                                       | e1  | 1372 mm                 | 54 in                   |
| Bodenfreiheit der Maschine                           | m4  | 201 mm                  | 8 in                    |
| Overall length - Less Bucket                         | l2  | 2359.66 mm              | 93 in                   |
| Clearance Radius - Front with Bucket                 | b18 | 1842 mm                 | 73 in                   |
| Wendekreis - vorne ohne Schaufel                     | b19 | 1120 mm                 | 44 in                   |
| Clearance Circle - Rear                              | wa1 | 1372 mm                 | 54 in                   |
| Leistung   |     |                         |                         |
| Fahrgeschwindigkeit (unbeladen)                      |     | 12.90 km/h              | 8 mi/h                  |
| Reifen   |     |                         |                         |
| Standard tyres                                       |     | 10.00x16.5 HD           | 10.00x16.5 HD           |
| Motor  |     |                         |                         |
| Marke  |     | Yanmar                  | Yanmar                  |
| Motor Modell   |     | 4TNV88C                 | 4TNV88C                 |
| Motornorm  |     | Stage V / Tier 4        | Stage V / Tier 4        |
| Gross Power (kW)                                     |     | 34.30 kW                | 46 Hp                   |
| Net Power (kW)                                       |     | 33.20 kW                | 45 Hp                   |
| Max. Drehmoment / Motordrehzahl                      |     | 146.20 Nm / 1820 rpm    | 108 ft/lbs / 1820 rpm   |
| Batterie   |     | 12 V                    | 12 V                    |
| Starter (kW)   |     | 2.30 kW                 | 3 Hp                    |
| Hydraulisch  |     |                         |                         |
| Zusatzhydraulik                                      |     | 63.60 l/min             | 17 US gpm               |
| Tankkapazität  |     |                         |                         |
| Kapazität des Kraftstoffbehälters                    |     | 59.40 l                 | 16 US gal               |
| Hubraum  |     | 2.19 l                  | 0.58 US gal             |
| Lärm und Vibrationen                                 |     |                         |                         |
| Umgebungsgeräusch (LwA)                              |     | 101 dB                  | 101 dB                  |
| Ganzkörper Schwingungen (ISO 2631 - 1)               |     | 0.81 m/s <sup>2</sup>   | 0.81 m/s <sup>2</sup>   |
| Vibrationswert an Händen / Armen                     |     | < 1.77 m/s <sup>2</sup> | < 1.77 m/s <sup>2</sup> |

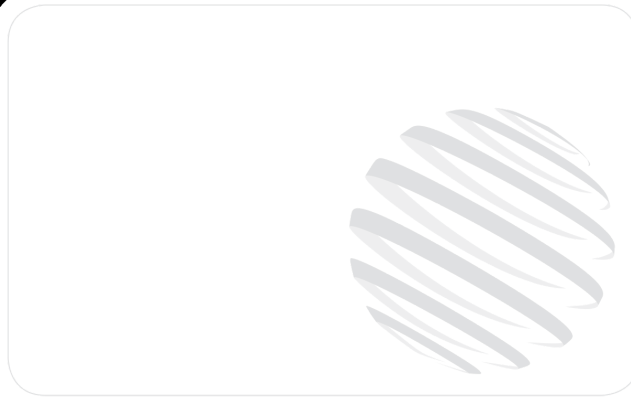

# GEHL®

Siège Social  
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095  
Tel: (262) 334-9461 - Fax: (262) 338-7517  
[www.gehl.com](http://www.gehl.com)



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend