

Technical sheet :

# **FRAME MOUNTED HOOK**

---



## **Benefits**


- Simple and cost efficient solutions for suspended load handling.
- Very compact attachment that preserves machine stability.
- Perfect for transporting construction elements and other loads present in construction or industrial sites.

## **Technical characteristics**

- Range from 4000 kg to 6000 kg capacity.
- Directly hitched on carriage.
- Safety: homologated swivel self locking hook.

Capacities		PC 50	PC 60
Max. outreach (in)	r1	1' 7"	1' 7"
Capacity (lbs)		11023	13228
Weight and dimensions			
Overall height (in)	h17	1' 8"	1' 8"
Width (in)		2' 8"	2' 8"
Length (in)		2'	2'
Overall weight (lbs)		265	265
Working Parameters			
Machine Equipment		No predisposition required	No predisposition required
Hydraulic system		false	false
Machines compatibility		PC 50	PC 60
Reference number		708544	939050
Skid Steer Carriage reference		52579090	-
MHT-X 860 S2		-	X
MLT 420 - 60 H		X	-
MLT 625 - 75 H		X	-
MLT 845-100 H		X	-
MLT 845-120		X	-
MLT 961-145 V+ L		X	X
MLT-X 625 - 75 H		X	-
MLT-X 845-120		X	-
MLT-X 845-120 H		X	-
MLT-X 961-145 V+ L		X	X
MT 625 H		X	-
MT 625 HA		X	-
MT 733 Easy		X	-
MT 933 Easy		X	-
MT 1033 easy		X	-
MT 1135		X	-
MT 1335		X	-
MT 1440		X	-
MT 1440 A		X	-
MT 1440 HA		X	-
MT 1840		X	-
MT 1840 A		X	-
MT 1840 HA		X	-
MT-X 625 H		X	-
MT-X 733		X	-
MT-X 1033		X	-
MT-X 1440		X	-
MT-X 1440 A		X	-
MT-X 1840		X	-
MT-X 1840 A		X	-
Reference number E-RECO		921335	939050
MRT 1640 Easy T4 S2 360°		X	-
MRT 1840 Easy T4 S2 360°		X	-
MRT 1840 Easy T4 S2 400°		X	-
MRT 2145 Easy T4 S2 360°		X	-
MRT 2145 Easy T4 S2 400°		X	-
MRT 2150 Privilege Plus		X	-
MRT 2470 Privilege Plus		X	X
MRT 2545 Easy T4 S2 360°		X	-
MRT 2545 Easy T4 S2 400°		X	-
MRT 2550 Privilege Plus		X	-
MRT 3050 Privilege Plus		X	-
MRT 3255 Privilege Plus		X	X
MRT-X 1440 Easy 400°		X	-
MRT-X 1640 Easy 360°		X	-
MRT-X 1640 Easy 400°		X	-
MRT-X 1840 Easy 360°		X	-
MRT-X 1840 Easy 400°		X	-

Machines compatibility	PC 50	PC 60
MRT-X 2150 Privilege Plus	X	-
MRT-X 2470 Privilege Plus	X	X
MRT-X 2545 Easy 360°	X	-
MRT-X 2545 Easy 400°	X	-
MRT-X 2550 Privilege Plus	X	-
MRT-X 3050 Privilege Plus	X	-
MRT-X 3255 Privilege Plus	X	X

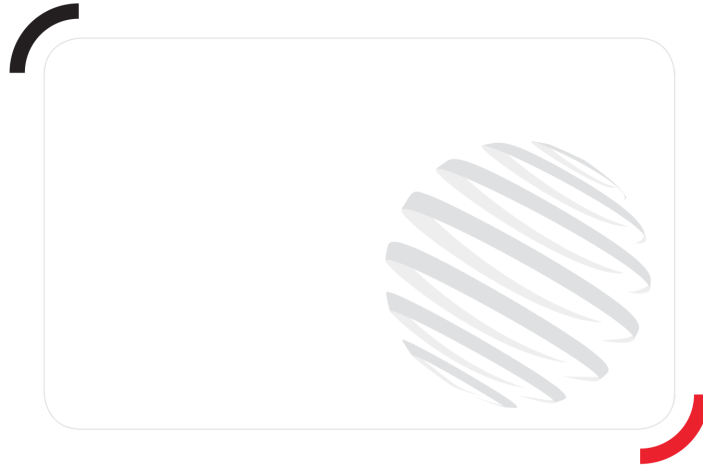

Siège Social  
430 rue de l'Aubinière - 44150 Ancenis Cedex - France  
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508  
RCS Nantes