

Technical sheet :

# ENVIRONMENT BUCKET




## Benefits

- Extensive use of high resistance steel: body made of S355 steel, side knives, 500 HB lower wear pads and bolt-on blades, etc.
- 3° angle between the bolt-on blade & the bucket's floor for more longevity.
- Massive structure adapted to the recycling conditions (carriage, bottom, body etc.).
- Integrated spill guard to limit material loss while traveling.

## Technical characteristics

- Bucket developed for a severe, daily use.
- Ideal attachment for the handling of bulk materials (paper, crushed green waste, etc.).
- Flat bottom for an easy penetration in the waste pit & an efficient unloading.
- Max. material density: 1000 kg/m<sup>3</sup>.

# Environment Bucket - Dimensional drawing

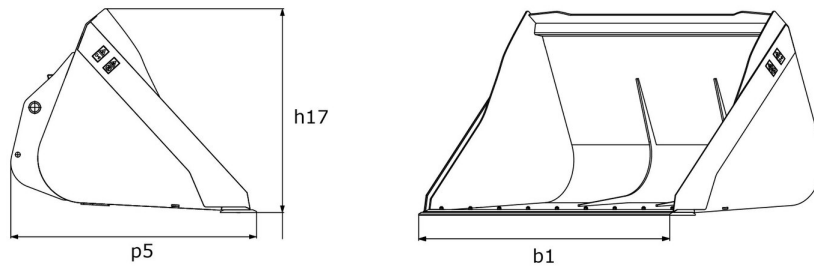

Capacities		CBA 2450 / 2200 EN	CBA 2500 / 3200 EN
Heaped Capacity (US gal)		587.52	844.56
Struck capacity (US gal)		362.18	656.47
Weight and dimensions			
Overall height (in)	h17	4'	4' 8"
Width (in)		8'	8' 2"
Length (in)		4' 11"	5' 8"
Overall weight (lb)		2008.41	2447.13
Working Parameters			
Machine Equipment		✕	✕
Other Data for Attachments			
Bolted wearplate (LDR)		Standard	Standard
Wear plate hardness		500	500

Machines compatibility	CBA 2450 / 2200 EN	CBA 2500 / 3200 EN
Reference number	52000524	52000125
MLT 635-130 PS+	X	-
MLT 635-140 V+	X	-
MLT 733-115	X	-
MLT 733-115 LSU	X	-
MLT 737-130 PS+	X	-
MLT 741-130 PS+	X	-
MLT 741-140 V+	X	-
MLT 841-145 PS+	X	-
MLT 961-160 V+ L	-	X
MLT 1041-145 PS+L	X	-
MLFX 741-140 V+	X	-
MLFX 841 - 145 PS+	X	-
MLFX 961-160 V+ L	-	X
MLFX 1041-145 PS+L	X	-
MLT 635-130 PS+ ST4 <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 635-140 V+ ST4 <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 733-115 LSU ST4 <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 733-115 ST4 <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 737-130 PS+ ST4 <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 840-145 PS+ <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 845-100 H <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLT 961-145 V+ L <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	-	X
MLFX 840-140 PS+ <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLFX 845-120 H <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	X	-
MLFX 961-145 V+ L <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">OLD</span>	-	X

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes