V420


SKID LOADERS





v420 Erstellt am 19. April 2024 um 18:19:57 UTC

		V420 ETSLEILL ATH 19. APTIL 2024 UTH 18.19.57 UTC		
Capacities		Metrisch	US-System	
Rated Operating Capacity		1905 kg	4200 lb	
Unladen weight		5291 kg	11665 lb	
Weight and dimensions				
Overall Operating Height - Fully Raised	h27	4744 mm	187 in	
Height to Hinge Pin – Fully Raised	h28	3653 mm	144 in	
Overall Height to top of ROPS	h17	2083 mm	82 in	
Dump angle at full height	a5	31 °	31 °	
Dump height	h29	2921 mm	115 in	
Overall length with bucket	l16	4039 mm	159 in	
Dump reach - Full height	r6	965 mm	38 in	
Rollback at ground	a13	30 °	30 °	
Wheelbase	У	1384 mm	54 in	
Overall width less bucket	b1	2057 mm	81 in	
Bucket Width	e1	2134 mm	84 in	
Ground clearance	m4	197 mm	8 in	
Overall length - Less Bucket	12	3124 mm	123 in	
Clearance Radius - Front with Bucket	b18	2484 mm	98 in	
Clearance Circle - Front without Bucket	b19	1410 mm	56 in	
Clearance Circle - Rear	wa1	1880 mm	74 in	
Performances				
Travel Speed with Two-Speed Option - Maximum		18.70 km/h	12 mph	
Wheels				
Standard tires		14.00x17.5 HD	14.00x17.5 HD	
Engine				
Engine brand		Deutz	Deutz	
Engine model		TCD 3.6	TCD 3.6	
Engine norm		Stage IV / Tier 4 Final	Stage IV / Tier 4 Final	
Gross Power		90 kW	90 kW	
Max. torque / Engine rotation		480 Nm / 2200 rpm	354 ft/lbs / 2200 rpm	
Power source		Diesel	Diesel	
Battery voltage		12 V	12 V	
Starter		4 kW	4 kW	
Hydraulics				
Standard flow - Auxiliary hydraulics		114 l/min	30 US gpm	
High-Flow Auxiliary Hydraulics – Option		155 l/min	41 US gpm	
Tank capacities				
Fuel tank		144 l	38 US gal	
Reservoir Capacity Hydraulics		59.80 l	16 US gal	
Displacement		3.60 l	0.95 US gal	
Noise and vibration				
Noise to environment (LwA)		82.90 dB	82.90 dB	
Whole-Body Vibration (ISO 2631-1)		1.09 m/s²	1.09 m/s²	
Vibration to whole hand/arm		< 1.15 m/s²	< 1.15 m/s ²	

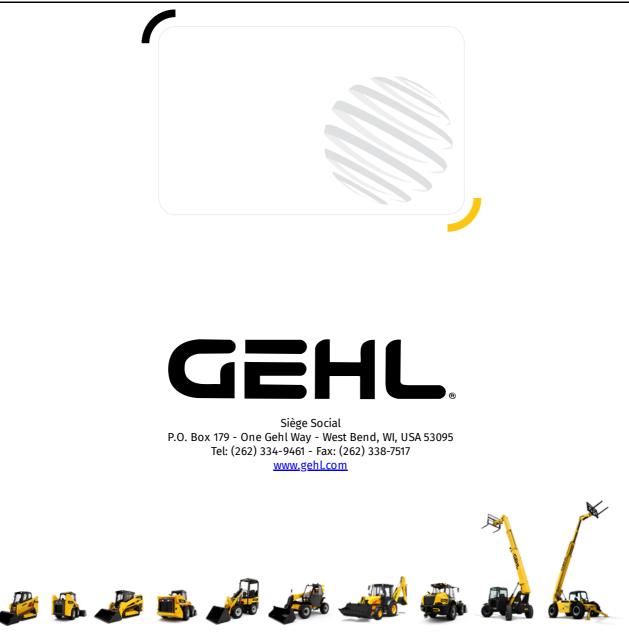

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend