


Technical sheet :

WIDE OPENING FORK POSITIONER

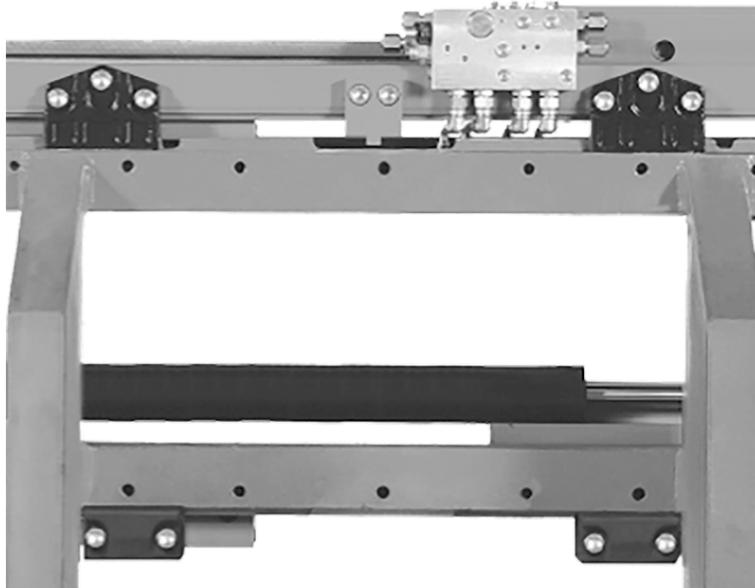

Benefits

- Homologated by Manitou = perfect integration of the attachment on the truck.
- Spread forks beyond the truck's width.
- Efficiency in wide load handling.
- Component placement designed to optimize visibility.
- Very efficient fork synchronization.
- High component protection.


Technical characteristics

- "Double T" frame structure = resistance & visibility.
- "Industrial clamp" frame type = rigidity.
- Uses the truck's ISO forks.
- Fork synchronization through a dedicated hydraulic valve.
- Valve block placed on the back of the attachment=protection.
- No side shift: recommended on trucks with integrated side shift.

Capacities		CAI 1680 / 2500 P	CAI 1720 / 2800 P
Capacity (lb)		5511.56	6172.94
Weight and dimensions			
Overall length (in)	11	6"	7"
Overall height (in)	h17	2' 1"	2' 5"
Width (in)		2' 10"	3' 2"
Overall weight (lb)		425.49	513.68
Working Parameters			
Machine Equipment			
Fork spread minimum (in)	b5	1' 10"	1' 10"
Fork spread maximum (in)	b5	5' 6"	5' 8"

Machines compatibility	CAI 1680 / 2500 P	CAI 1720 / 2800 P
Reference number	52531185	52531186
MI 15 D 	X	-
MI 15 G 	X	-
MI 18 D 	X	-
MI 18 G 	X	-
MI 20 D 	X	-
MI 20 G 	X	-
MI 25 D 	X	-
MI 25 G 	X	-
MI 30 D 	-	X
MI 30 G 	-	X
MI 35 D 	-	X
MI 35 G 	-	X

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition

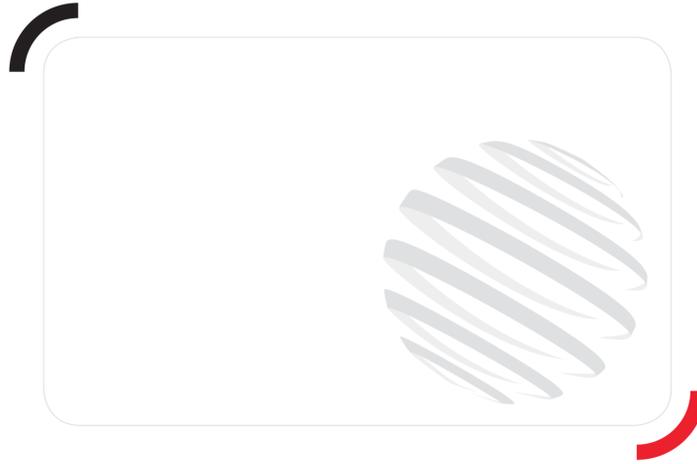

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39 547 824 euros - 857 802 508 RCS Nantes