

Technical sheet :

# MT 1440

---



 **MANITOU**  
HANDLING YOUR WORLD


Capacities		Imperial
Max. capacity		8818 lb
Max. lifting height		44 ft 5 in
Max. outreach		31 ft
Breakout force with bucket		7895 daN
Weight and dimensions		
Overall length to carriage	l11	19 ft 9 in
Length to face of forks	l2	20 ft 1 in
Overall width	b1	7 ft 9 in
Overall height	h17	8 ft
Wheelbase	y	10 ft 1 in
Ground clearance	m4	1 ft 3 in
Overall cab width	b4	2 ft 11 in
Tilt-up angle	a4	12 °
Tilt-down angle	a5	114 °
External turning radius (over tyres)	Wa1	12 ft 11 in
Unladen weight (with forks)		24119 lb
Overall weight		24692 lb
Tires type		Pneumatic
Standard tires		Alliance 400/80 - 24 - 162A8
Forks length / width / section	l / e / s	47 in x 5 in / 2 in
Frame leveling corrector	a9	63 °
Performances		
Lifting		15.90 s
Lowering		12.10 s
Extension		17.10 s
Retraction		12.70 s
Crowd		4.30 s
Dump		3.90 s
Engine		
Engine brand		Perkins
Engine norm		Stage IV / Tier 4 Final
Engine model		854F-E34TAN
Number of cylinders / Capacity of cylinders		4 - 207 in³
I.C. Engine power rating - Power		100 Hp / 75 kW
Max. torque / Engine rotation		317 ft/lbs @ 1400 rpm
Drawbar pull (Laden)		8090 daN
Electric circuit		
12V Battery capacity		120 Ah
Transmission		
Transmission type		Torque converter
Number of gears (forward / reverse)		4 / 4
Max. travel speed		15 mph
Parking brake		Automatic parking brake
Service brake		Oil-immersed multi-discs braking on front & rear axles
Hydraulics		
Hydraulic pump type		Gear pump
Hydraulic flow / Pressure		45 US gpm-3916 PSI
Tank capacities		
Engine oil		2 US gal
Hydraulic oil		36 US gal
Fuel tank		37 US gal
DEF tank capacity		6 US gal
Noise and vibration		
Noise at driving position (LpA)		78 dB
Noise to environment (LwA)		103 dB
Vibration on hands/arms		< 2.50 m/s²
Miscellaneous		
Steering wheels (front / rear)		2 / 2
Drive wheels (front / rear)		2 / 2
Safety / Safety cab homologation		Standard EN 15000 / ROPS - FOPS level 2 cab
Controls		JSM

MT 1440 - Dimensional drawing




MT 1440 - Load chart

Machine on tyres with forks Imperial

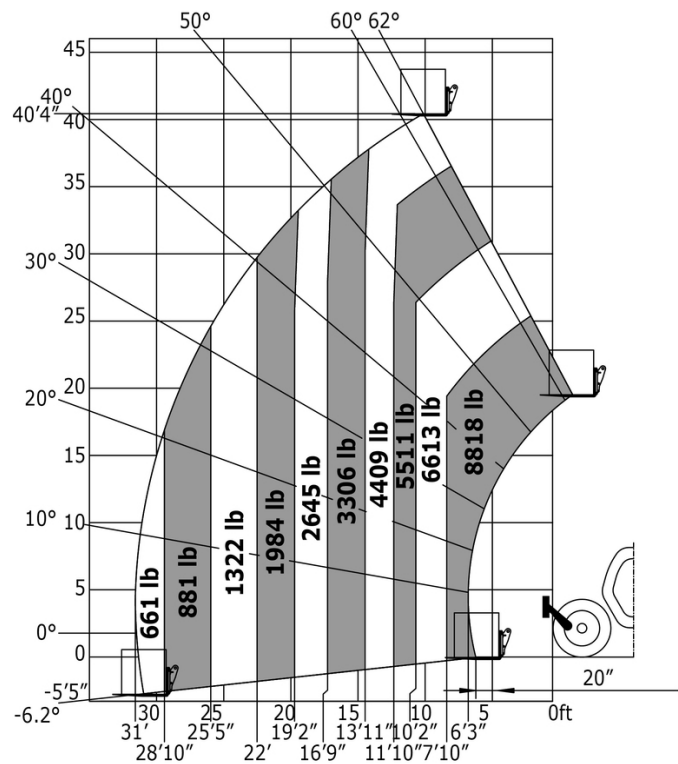

Machine on lowered stabilisers with forks Imperial

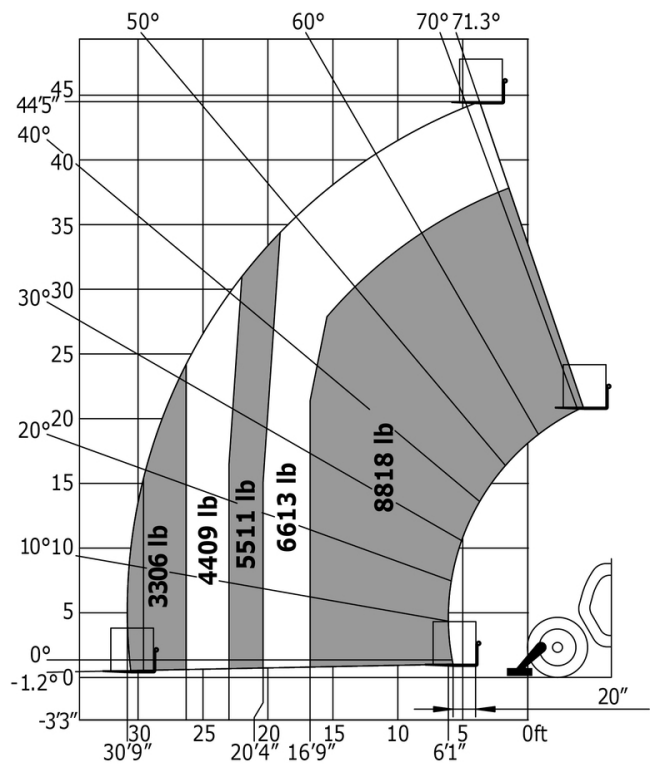



**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes