

Technical sheet :

EXTENSION JIB WITH WINCH



Benefits


- Handling solution for suspended loads for all type of building sites.
- Turn your telehandler into a crane.
- Perfect for transporting and placing beams, frames and other suspended loads.
- Its winch allows to gain greater flexibility while keeping an important forward reach.
- Tubular structure designed for an optimal weight/rigidity ratio.

Technical characteristics

- Wide range of crane with winch from 600 kg to 2000 kg with a forward reach max. from 4 m to 2.5 m.
- Oil immersed negative brakes.
- Safety: homologated swil self locking hook.
- Limit switch sensor (up and down).

Capacities		PT 600	PT 1000	PT 1500	PT 2000 (a)	PT 2000 (b)
Max. outreach (in)	r1	13' 6"	13' 6"	8' 8"	6' 7"	6' 7"
Working height (in)	h21	124' 8"	88' 7"	114' 10"	78' 9"	78' 9"
Capacity (lbs)		1323	2205	3307	4409	4409
Weight and dimensions						
Overall height (in)	h17	124' 8"	88' 7"	114' 10"	78' 9"	78' 9"
Width (in)		2' 8"	2' 8"	2' 8"	2' 8"	2' 8"
Length (in)		131' 3"	183' 9"	9' 6"	7' 10"	7' 10"
Overall weight (lbs)		613	659	714	794	780
Cable length (in)		131' 3"	183' 9"	121' 5"	160' 9"	229' 8"
Working Parameters						
Hook Speed (m/mn)		94	44	48	24	24
Hydraulic system		false	false	false	false	false

Machines compatibility	PT 600	PT 1000	PT 1500	PT 2000 (a)	PT 2000 (b)
Reference number	708538	-	-	-	-
MT 733 Easy	X	-	-	-	-
MT 933 Easy	X	-	-	-	-
MT 1033 easy	X	-	-	-	-
MT 1440	X	-	-	-	-
MT 1440 A	X	-	-	-	-
MT 1440 HA	X	-	-	-	-
MT 1840	X	-	-	-	-
MT 1840 A	X	-	-	-	-
MT-X 733	X	-	-	-	-
MT-X 1033	X	-	-	-	-
MT-X 1440	X	-	-	-	-
MT-X 1440 A	X	-	-	-	-
MT-X 1840	X	-	-	-	-
MT-X 1840 A	X	-	-	-	-
Reference number E-RECO	921325	921326	921330	921331	939392
MRT 1440 Easy T4 S2 400°	X	X	-	-	-
MRT 1640 Easy T4 S1 400°	-	-	-	X	-
MRT 1640 Easy T4 S2 360°	X	X	X	X	-
MRT 1640 Easy T4 S2 400°	-	X	-	-	-
MRT 1840 Easy T4 S1 360°	-	X	-	-	-
MRT 1840 Easy T4 S1 400°	-	X	-	-	-
MRT 1840 Easy T4 S2 360°	X	X	X	X	-
MRT 1840 Easy T4 S2 400°	X	X	X	X	-
MRT 2145 Easy T4 S2 360°	X	X	X	X	-
MRT 2145 Easy T4 S2 400°	X	X	X	X	-
MRT 2150 Privilege Plus	X	X	X	X	-
MRT 2470 Privilege Plus	X	-	-	-	X
MRT 2545 Easy T4 S2 360°	X	X	X	X	-
MRT 2545 Easy T4 S2 400°	X	X	X	X	-
MRT 2550 Privilege Plus	X	X	X	X	-
MRT 3050 Privilege Plus	X	X	-	-	X
MRT 3255 Privilege Plus	X	-	X	-	X
MRT-X 1440 Easy 400°	X	X	X	X	-
MRT-X 1640 Easy 360°	X	X	X	X	-
MRT-X 1640 Easy 400°	X	X	X	X	-
MRT-X 1840 Easy 360°	X	X	X	X	-
MRT-X 1840 Easy 400°	X	X	X	X	-
MRT-X 2145 Easy 360°	-	X	-	-	-
MRT-X 2145 Easy 400°	-	X	-	-	-
MRT-X 2150 Privilege Plus	X	X	X	X	-
MRT-X 2470 Privilege Plus	X	-	-	-	X
MRT-X 2545 Easy 360°	X	X	X	X	-
MRT-X 2545 Easy 400°	X	X	X	X	-
MRT-X 2550 Privilege Plus	X	X	X	X	-
MRT-X 3050 Privilege Plus	X	X	-	-	X
MRT-X 3255 Privilege Plus	X	-	X	-	X

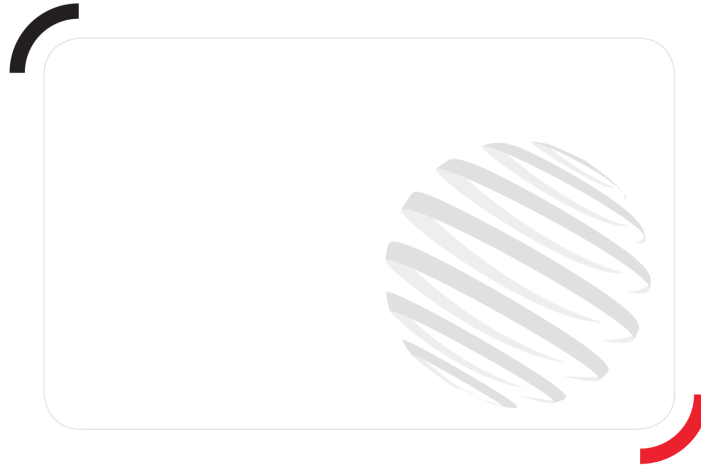

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes