

Technical sheet :

MANURE FORK WITH GRAPPLE (COMPACT MACHINES)



Customer benefits

- Attachment designed for agricultural applications.

Technical characteristics

- Complete grapple opening for an efficient work.
- Heavy duty teeth & tines.

 **ATTACHMENTS**

Capacities		FMG 920 / 240 (a)	FMG 920 / 240 (b)	FMG 1080 / 290	FMG 1100 / 320	FMG 1200 / 320 (a)	FMG 1200 / 320 (b)	FMG 1200 / 430	FMG 1400 / 380	FMG 1500 / 380	FMG 1500 / 540
Heaped capacity (US gal)		63	63	77	77	85	85	114	100	100	143
Weight											
Overall weight (lb)		265	265	287	320	317	300	397	331	364	470
Weight and dimensions											
Overall height (in)	h17	2' 5"	2' 5"	2' 5"	2' 5"	2' 5"	2' 5"	2' 7"	2' 5"	2' 5"	2' 7"
Width (in)		3'	3'	3' 7"	3' 7"	3' 11"	3' 11"	3' 11"	4' 7"	4' 11"	4' 11"
Depth (in)	p5	-	3'	3'	2' 9"	3'	3'	3' 4"	2' 9"	2' 9"	3' 4"
Working Parameters											
Machine Equipment											
Teeth / Fingers		3 / 5	3 / 5	3 / 6	6	3 / 6	3 / 6	6	4 / 7	4 / 8	8


Machines compatibility	FMG 920 / 240 (a)	FMG 920 / 240 (b)	FMG 1080 / 290	FMG 1100 / 320	FMG 1200 / 320 (a)	FMG 1200 / 320 (b)	FMG 1200 / 430	FMG 1400 / 380	FMG 1500 / 380	FMG 1500 / 540
All-Tach® Narrow	N004029	-	-	-	52799524	-	-	-	-	-
All-Tach®	-	N726022	N726023	-	-	N736028	N004099	N736029	N736030	52799529
4 point Camiage	N701956	-	-	-	52796387	-	-	-	-	52799527
Euro Camiage	-	-	-	52807870	52799523	-	-	-	-	52799528
1050R	-	-	-	-	-	X	-	X	X	-
1050RT	-	-	-	-	-	X	-	X	X	-
1350R NXT2	-	-	-	-	-	-	-	X	X	-
1350RT	-	-	-	-	X	X	-	X	X	-
1640 E	-	X	X	-	-	-	-	-	-	-
AL230	-	-	-	X	-	-	-	-	-	-
AL320	-	-	-	X	-	-	-	-	-	-
AL330	-	-	-	X	-	-	-	-	-	-
AL420	-	-	-	X	-	-	-	-	-	-
AL430	-	-	-	X	-	-	-	-	-	-
AL550	-	-	-	-	-	-	-	-	-	X
MLA 2-25 H	-	-	-	X	-	-	-	-	-	-
MLA 3-25 H	-	-	-	X	-	-	-	-	-	-
MLA 3-25 H-C	-	-	-	X	-	-	-	-	-	-
MLA 4-50 H	-	-	-	X	-	-	-	-	-	-
MLA 4-50 H-C	-	-	-	X	-	-	-	-	-	-
MLA 5-60 H-Z	-	-	-	-	-	-	-	-	-	X
RT105	-	-	-	-	-	X	-	X	X	-
RT135	-	-	-	-	-	X	-	X	X	-
AL340 OLD	-	-	-	-	X	-	-	-	-	-
AL440 OLD	-	-	-	-	-	-	-	-	-	X
MLA 1-25 H OLD	X	-	-	-	-	-	-	-	-	-
MLA 3-35 H OLD	-	-	-	X	X	-	-	-	-	-
MLA 4-50 H OLD	-	-	-	-	-	-	X	-	-	X

[illegible]

Capacities		FMG 2140 / 760 (a)	FMG 2140 / 760 (b)	FMG 2150
Heaped capacity (US gal)		201	201	227
Weight				
Overall weight (lb)		683	683	805
Weight and dimensions				
Overall height (in)	h17	2' 7"	2' 7"	2' 10"
Width (in)		7'	7'	7' 1"
Depth (in)	p5	3' 4"	3' 4"	3' 5"
Working Parameters				
Machine Equipment				
Teeth / Fingers		4 / 11	4 / 11	8 / 11

Machines compatibility	FMG 2140 / 760 (a)	FMG 2140 / 760 (b)	FMG 2150
All-Tach® Narrow	-	-	-
All-Tach®	N700261	N51502059	N51502510
4 point Camage	-	-	N51502629
Euro Camage	-	-	N51502588
2150RT	-	X	-
2750V	X	-	-
2750VT	-	X	-
3300V NXT2	X	-	-
4200V	X	-	-
AL750	-	-	X
RT215	-	X	-
V275 - NEW	X	-	-
VT275 - NEW	-	X	-

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition

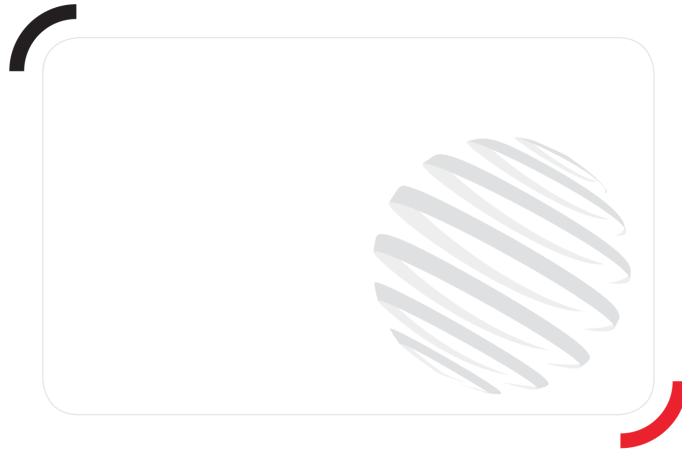

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes