

Technical sheet :


MSI-X 25



 **MANITOU**
HANDLING YOUR WORLD

	Technical characteristics		Imperial
1.1	Manufacturer		Manitou
1.2	Model Name		MSI-X_25
1.3	Power source		Diesel
1.4	Operator type		Seated
1.5	Max. capacity	Q	5512 lb
1.6	Load center of gravity	c	20 in
1.8	Load distance, centre of drive axle to fork	x	24 in
1.9	Wheelbase	y	75 in
	Weight		
2.1	Service weight		8543 lb
2.2	Weight on front axle (laden) / rear axle (laden)		12147 lb / 1907 lb
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		3380 lb / 5163 lb
	Wheels		
3.1	Tires type		Inflatable
3.2	Dimensions of front wheels		300-15/18 6T R43
3.3	Dimensions of rear wheels		7.00-12/12 ED PLUS
3.5	Number of front wheels / rear wheels		2 / 2
3.5.2	Number of drive wheels		2
3.6	Front wheel gauge	b10	41 in
3.7	Rear wheel gauge	b11	44 in
	Dimensions		
4.7	Height of overhead guard (cabin)	h6	82 in
4.8	Seat height/stand height	h7	38 in
4.19	Overall length	l1	165 in
4.20	Length to face of forks	l2	120 in
4.21	Overall width	b1	52 in
4.22	Forks section / width / length	s / e / l	2 in x 5 in x 45 in
4.23	Fork carriage ISO 2328 (class/form) A/B		2A
4.24	Fork carriage width	b3	50 in
4.31	Ground clearance below mast	m1	10 in
4.32	Ground clearance at centre of wheelbase	m2	9 in
4.33	Aisle Width for pallets 1000 x 1200 crossways	Ast	181 in
4.35	Turning radius	Wa	103 in
	Performances		
5.1	Travel speed (laden / unladen)		11 mph-14 mph
5.2	Lifting speed (laden / unladen)		2 ft/s-2 ft/s
5.3	Lowering speed (laden / unladen)		2 ft/s-0.98 ft/s
5.5	Drawbar pull (Laden / Unladen)		2010 daN / 1250 daN
5.7	Gradeability (laden / unladen)		33 % / 34 %
5.10	Service brake		Hydraulic brakes by loss of pressure
	Engine		
7.1	Engine brand / model		Kubota / V2403
7.2	Engine power according to ISO 1585		36 kW
7.3	Rated speed		2700 rpm
7.4	Number of cylinders / Capacity of cylinders		4 - 149 in³
	Miscellaneous		
8.1	Type of drive control		Cable
8.2	Working hydraulic pressure for attachments		2611 PSI
8.3	Oil flow rate for attachments		12 US gpm
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 80 dB
8.4	Sound level at the driver's ear according to DIN 12 053		80 dB

MSI-X 25 - Dimensional drawing

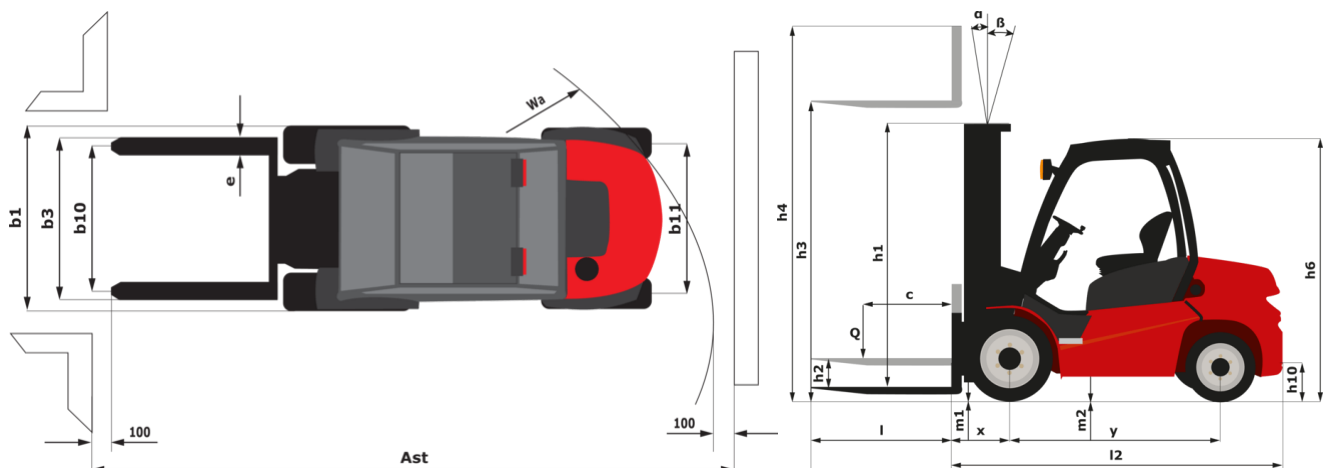

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)		FVD 30	FVD 33	FVD 37	FVD 40	FVD 45
Mast/fork carriage tilt, forward	°	10	10	10	10	10
Mast/fork carriage tilt, backward	°	12	12	12	12	12
h1 - Mast lowered height	in	84.1	90	100.2	107.7	117.6
h2 - Mast free lift	in	3.3	3.3	3.3	3.3	3.3
h3 - Mast lifting height	in	118.1	129.9	145.7	157.5	177.2
h4 - Mast extended height	in	147.2	159	174.7	186.5	206.2
Residual capacity at max height	lb	5512	5512			
Height at max capacity	in	118.1	129.9	98.4	98.4	98.4

Free Lift Triplex (FLT)		FLT 34	FLT 37	FLT 40	FLT 43	FLT 47	FLT 55	FLT 60
Mast/fork carriage tilt, forward	°	10	10	10	10	10	6	6
Mast/fork carriage tilt, backward	°	12	12	12	12	12	6	6
h1 - Mast lowered height	in	76.2	80.2	84.1	90	93.9	107.7	117.6
h2 - Mast free lift	in	46.6	50.5	54.4	58.4	64.3	74.5	82
h3 - Mast lifting height	in	133.9	145.7	157.5	169.3	185	216.5	236.2
h4 - Mast extended height	in	164.7	176.5	188.3	201.4	215.9	250.2	272.3
Residual capacity at max height	lb	5512	5512	5512	5512	5512		
Height at max capacity	in	133.9	145.7	157.5	169.3	185	98.4	98.4

Full Visibility Triplex (FVT)		FVT 33
Mast/fork carriage tilt, forward	°	10
Mast/fork carriage tilt, backward	°	12
h1 - Mast lowered height	in	71.9
h2 - Mast free lift	in	2.8
h3 - Mast lifting height	in	129.9
h4 - Mast extended height	in	158.5
Height at max capacity	in	98.4

**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com

This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes